


## Standard Centrifugal Vertical Pumps

- Available Configurations
  - Vertical Coupled
  - Vertical Frame
  - Vertical Close Coupled (Some Models)
- 1½"-18" Sizes Available
- Flow Rates From 50 to 18,000 GPM
- Solids Handling and Clear Liquids Models Available
- Solids Handling to 4.5"
- Heads to 600+ Feet
- Vertical P-Base Electric Motors Available with a Variety of Enclosure Options
- Reliance Immersible Motors Available
- Base Elbow With Clean Out
- Various Sealing Configurations Available
- Premium Hydraulic Efficiency For Reduced Operating Costs
- Two Year Warranty
- Low Maintenance
- Special Alloys Available



## Standard Centrifugal Solids Handling Pumps

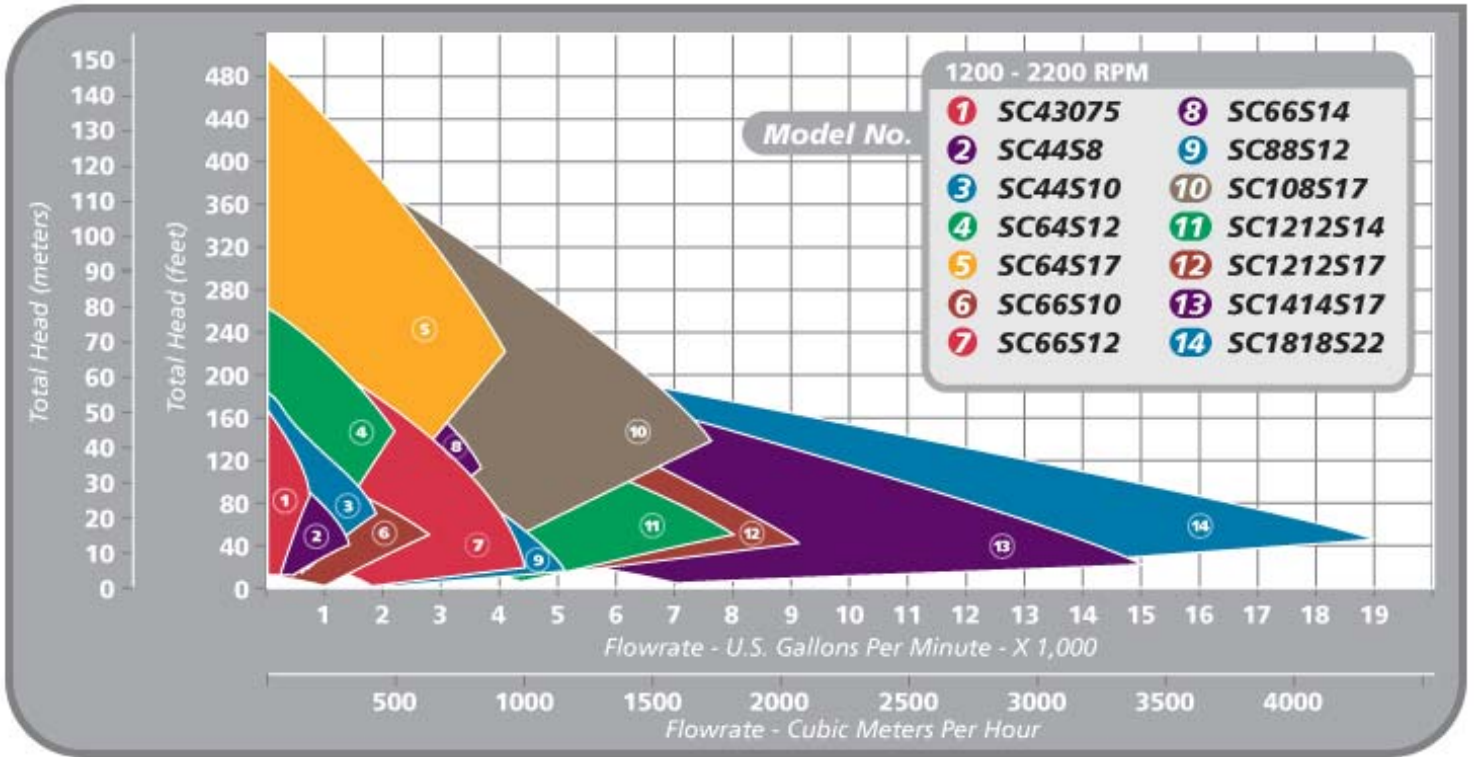

## Standard Centrifugal Clear Liquids Pumps

